

VAPURE[®]

SALT AND MINERAL CHLORINATOR

SIMPLY RELIABLE

SALT OR MINERAL SALT COMPATIBLE

MULTI-FUNCTION MENU SYSTEM

EASY TO USE TOUCH PAD

EFFICIENT CHLORINE
PRODUCTION

ULTRA LONG LIFE SELF-CLEANING
CELL

SIMPLE SET UP AND OPERATION

QUICK CONNECT CELL

HORIZONTAL OR VERTICAL
INSTALL OPTION WITH CELL
HOUSING

SMART TEMPERATURE SENSORS
(POWER SUPPLY & WATER)

EASY INSTALLATION TO NEW OR
EXISTING POOLS

SMART INTERFACE
CONNECTION TO:

- PH LOGIX CONTROLLER
- HEAT PUMP SIGNAL TO
TURN PUMP ON
- FLOW SWITCH

WIFI ENABLED WITH APP CONTROL



4 YEARS*
FULL WARRANTY
OR 10,000 OPERATING HOURS

*Domestic and Commercial installations, whichever comes first.

CAS | CRYSTAL
AQUATIC SYSTEMS

VAPURE®

SALT AND MINERAL CHLORINATOR


FEATURES

- **LOW SALT OPERATION: 3500PPM (0.35%) WITH BUILT IN REGULATOR FOR HIGH SALT**
- **FRESHWATER/ULTRA LOW SALT: 1500PPM (0.15%) OPTION AVAILABLE IN VP15LS, VP25LS & VP35LS MODEL**
- **BACKLIT LCD INTERFACE DISPLAYING DETAILED OPERATOR INSTRUCTIONS CLEARLY**
- **SMART SELF-CLEANING CELL ELECTRODE**
- **PREMIUM GRADE QUICK CONNECT TITANIUM CELL FOR INCREASED LIFESPAN**
- **BACKWASH, SUPER CHLORINATE AND WINTER MODE FUNCTIONS**
- **SINGLE OR DUAL TIMER CYCLES**
- **BUILT IN SALT/TDS TEST, WATER FLOW AND TEMPERATURE PROTECTION**
- **AUTOMATIC BATTERY BACK-UP TIMER**
- **SMART WI-FI & BLUETOOTH CONTROL AT YOUR FINGERTIPS**
- **SUITABLE FOR ALL POOL SURFACES (CONCRETE, FIBREGLASS, VINYL & TILED)**



SMART INTERFACE TO
CAS PH-LOGIX
*SOLD SEPERATELY

VAPURE® SIZING CHART

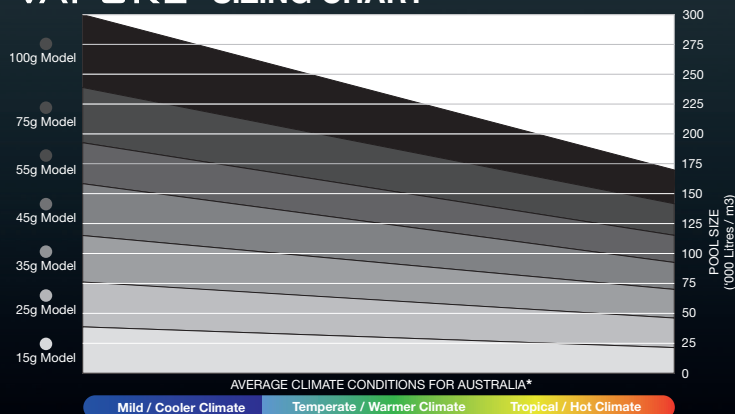

CHLORINE PRODUCTION

Model	Per Hour			Per 8 Hours		
	Chlorine Output	Cal.Hypo Equivalent (65%)	Sod.Hypo. Equivalent (12.5%)	Chlorine Output	Cal.Hypo Equivalent (65%)	Sod.Hypo. Equivalent (12.5%)
VP15	15g	23g	120ml	120g	184g	960ml
VP15LS	15g	23g	120ml	120g	184g	960ml
VP25	25g	38g	200ml	200g	304g	1600ml
VP25LS	25g	38g	200ml	200g	304g	1600ml
VP35	35g	54g	280ml	280g	432g	2240ml
VP35LS	35g	54g	280ml	280g	432g	2240ml
VP45	45g	69g	360ml	360g	552g	2880ml
VP55HD	55g	85g	440ml	440g	680g	3520ml
VP75HD	75g	115g	600ml	600g	920g	2880ml
VP100HD	100g	154g	800ml	800g	1232g	3520ml

VP55-100HD is only available in HD (15,000hr) material. VP15-45 available in HD material, add HD after the MODEL.

SPECIFICATION TABLE

Model	Input Volts (Vac)	Input Amps** (Aac)	Input Power (Watts)	Output Volts (Vdc)	Output Amps** (Adc)	Frequency (Hz)	Weight (kg)	Dimensions (cm)
VP15	220-240	0.86	204.7	7.57	15.0	50/60	9.70	46Lx37Wx21H
VP15LS	220-240	0.86	204.7	7.57	15.0	50/60	9.85	46Lx37Wx21H
VP25	220-240	1.25	293.0	7.38	25.0	50/60	12.30	46Lx37Wx21H
VP25LS	220-240	1.25	293.0	7.38	25.0	50/60	12.45	46Lx37Wx21H
VP35	220-240	1.06	244.9	8.02	17.5	50/60	12.80	46Lx37Wx21H
VP35LS	220-240	1.06	244.9	8.02	17.5	50/60	12.95	46Lx37Wx21H
VP45	220-240	1.30	292.2	7.98	22.5	50/60	12.90	46Lx37Wx21H
VP55HD	220-240	1.78	413.0	8.73	27.5	50/60	15.35	46Lx37Wx21H
VP75HD	220-240	1.70	380.0	16.40	15.0	50/60	18.00	46Lx37Wx21H
VP100HD	220-240	2.00	432.0	15.75	20.0	50/60	21.00	46Lx37Wx21H

** - all readings taken at 230Vac and in optimum salt water ppm, with a water temperature of 26°C.



MULTI-DIRECTION CELL &
HOUSING INCLUDED

CAS | CRYSTAL
AQUATIC SYSTEMS

7 City Link Drive Carrara Queensland, 4211
Ph: +61 7 5522 9763 Email: info@crystalas.com

www.crystalas.com



Your Local Agent